

Safety device with multiple function: **SIMAX3N**

Type SIMAX3N for protection of Tapping Points, Distribution Lines and Gas Manifold Systems

The safety device SIMAX3N according to DIN EN ISO 5175-1/EN 561, ISO 7289:

- avoids dangerous gas mixtures by a gas non-return valve (NV)
- stops flashback through flame arrestor (FA)
- a temperature-sensitive cut-off valve stops the gas flow when a predetermined temperature is exceeded (TV)
- a dust filter protects the gas non-return valve against contamination
- every safety device is 100% tested
- all metal components in brass 2.0401 / spring 1.4310

Safety elements of the safety device SIMAX3N:

- NV Gas non-return valve
- FA Flame arrestor
- TV Temperature-sensitive cut-off valve

Additional features:

- DF Dust filter



Maintenance:

The safety devices are to be tested by a qualified and authorised person at regular intervals according to country specific regulations. The safety device is to be tested for gas tightness, gas flow and gas return at least once a year.

We would be pleased to offer you the flashback arrestor testing unit model PVGD.

The safety device SIMAX3N can be repaired by a qualified and authorized person.

The single flashback arrestor units contained in this safety device can be replaced, but they must not be opened.

Technical Data:

| | | | | | |
|---------------------------------------|----------------------|---------------------|--|----------------------|--------------------|
| Gas types: | Acetylene (A) | Industrial gas (C) | Natural Gas (Methane) (M) Propane (P) | Oxygen (O) | Compressed Air (D) |
| Working pressure: | 0,15 MPa 1,5 bar | 0,40 MPa 4,0 bar | 0,50 MPa 5,0 bar | 2,5 MPa 25 bar | 2,5 MPa 25 bar |
| Ambient temperature: | -20°C up to +70°C | | | | |
| Threads: EN 560, ISO / TR 28821 | G1RH F ³⁾ | | | G1RH F ³⁾ | |
| Measure and weight: | diameter: | | length: | | weight: |
| | 88,0 mm | | 163,0 mm | | 3351,0 g |
| Applications: | | | | | |
| Process: | welding | | cutting | | heating |
| | up to 30 mm | | > 700 mm | | > 100 mm |




Other materials, surface finishing, gas types and additional connections available on request.

The working pressures approved by the UL are different to what is stated above.

Further information in this regard can be provided on request

³⁾ F = Female, M = Male

Other materials, surface finishing, gas types and additional connections available on request.

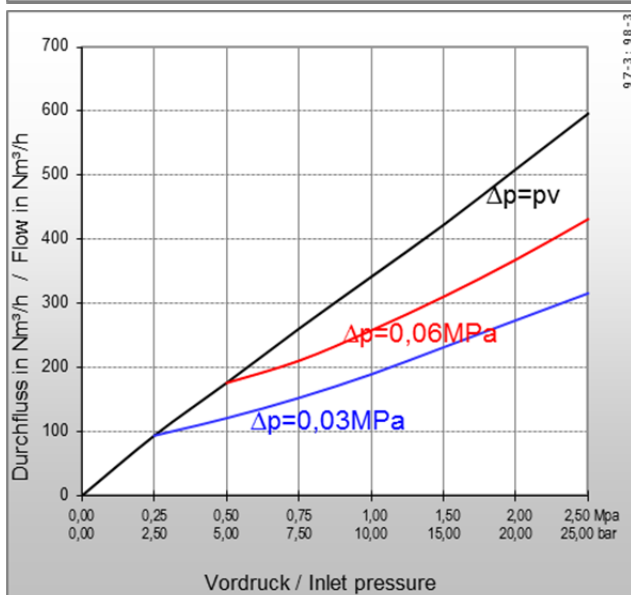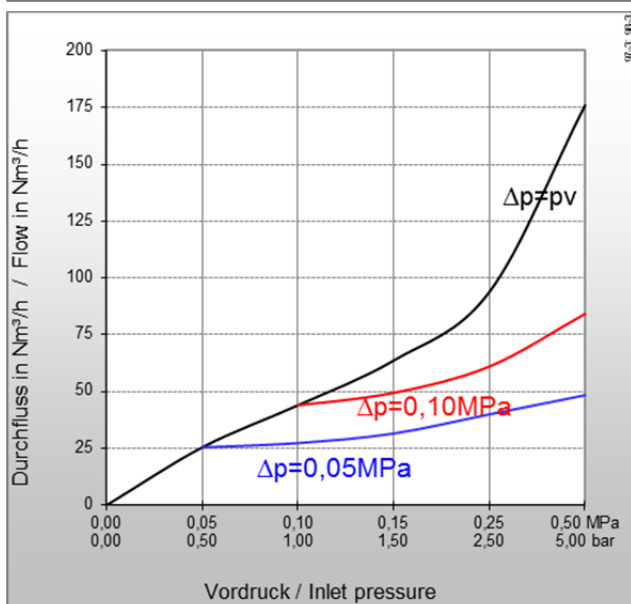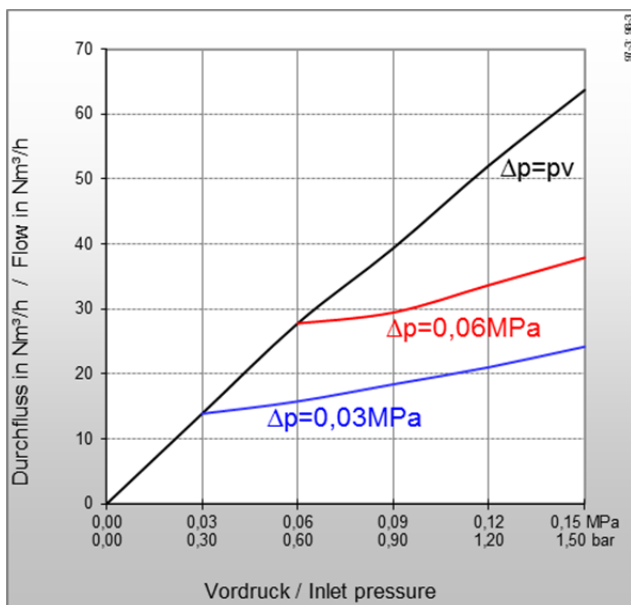

Type: SIMAX3N

Flow rates [air]:

pv = Primary pressure

ph = Secondary pressure

Δp = Primary pressure minus Secondary pressure

Conversion Factors:


0,1 MPa = 1 bar = 100 kPa = 14,504 psi

1 m³/h = 35,31 cu ft/h

| | A | H | P | M | M | O | E | L |
|------|-------------------------------|----------------|-------------------------------|--------------------|-----------------|----------------|-------------------------------|-------------------------------|
| QG ► | C ₂ H ₂ | H ₂ | C ₃ H ₈ | CH ₄ +C | CH ₄ | O ₂ | C ₂ H ₄ | C ₃ H ₆ |
| F | 1,2 | 3,8* | 0,90 | 1,25 | 1,4 | 0,95 | 1,02 | 0,92 |

* Conversion factor 2.5 for devices comprising a flame arrestor
The conversion factor for free flow is 3.8.
(Reference: BAM report 220, D. Lietze)

Example:

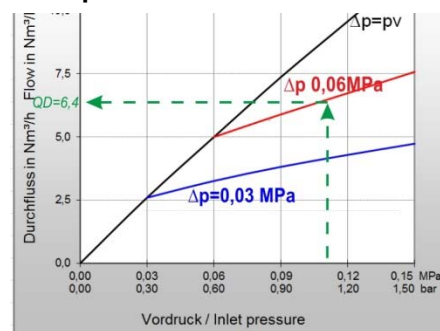

$$QG = QD \times F$$

$$QG \text{ ► } A = 6,4 \times 1,2 = 7,68 \text{ m}^3/\text{h C}_2\text{H}_2$$

QG = flow / gas type

F = conversion factor

QD = flow / air

For further information please contact:

Spectron Gas Control Systems GmbH

Fritz-Klatte-Str. 8

D-65933 Frankfurt

Tel.: +49 (0) 69 38016-0 Fax: +49 (0) 69 38016-200

(Subject to alteration without prior notice)